

FIRST RESPONDER

FRX-PTS


WHAT IT TAKES TO RESPOND

Designed for mobility and simplicity, the FRX deploys quickly and easily by one person. The controller allows for 2 or 4 phase operations with easily adjustable times. The signal heads are standard 12" RYG LED's. When fully deployed, the system reaches a height of 12' for max visibility. The FRX was specifically engineered to be deployed by emergency personnel to signalize a standard 4-way intersection, reducing the need for staff to personally direct traffic. However, there are many other applications for the FRX to quickly and temporarily assist in mitigating heavy traffic volume such as large sporting events or concerts.

12" LED SIGNAL HEADS →
FOR MAXIMUM VISIBILITY

RETURN ON INVESTMENT →
DEPLOYS IN UNDER 1 MINUTE, INCLUDES WIRELESS
REMOTE CONTROL

JUST THAT
SIMPLE →
ONE PERSON, ONE CRANK,
ONE BUTTON

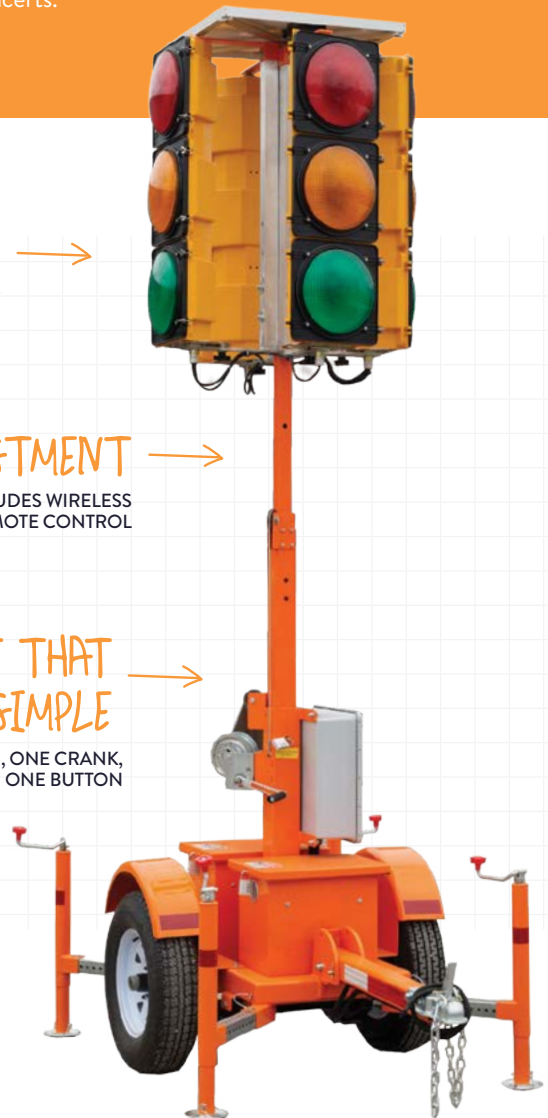

A TRUSTED CRISIS
RESPONSE SOLUTION.



FIRST RESPONDER

FRX-PTS

FRX-PTS • STANDARD FEATURES

DEPLOYMENT

Manual winch

SIGNAL HEAD CONFIGURATIONS

4-3 section (RYG)

TRAFFIC CONTROL EQUIPMENT

Proprietary OMJC controller

CHARGING SOURCE

DC | MPPT Solar Charge Controller

AC | 120V plug-in charger

WIRELESS MANUAL CONTROL

Push button control

SPECIFICATIONS

TRAVEL SIZE

80" L x 41" W x 8.3' H

DEPLOYED SIZE

63" L x 48" W x 12' H

CLEARANCE (UNDER SIGNAL)

8'

STANDARD WEIGHT

< 1,000lbs.

BATTERIES

220 Ah of AGM batteries, no-spill, no-maintenance

SOLAR

1-55 watt solar panel



☎ 1.800.776.5999

✉ sales@omjcsignal.com

🌐 omjcsignal.com

🏠 403 Chestnut Street, Waterloo, IA 50703